

MP-110 UM

/



1	3
2	MP-110	3
3	3
4	4
4.1	4
4.2	4
4.3	4
4.4	5
4.5	5
4.6	5
4.7	5
4.8	6
5	6
6	7
6.1	7
6.2	7
6.3	P-4a 1200W	7
6.4	7
6.5	7
6.5.1	7
6.5.2	(6-)	7
6.5.3	7
6.5.4	7
6.5.5 - 2	7
6.5.6	7
7	8
8	8

1

DYTRON –

2


MP-110

MP-110

()

3

Ø 40-110
30
1200
4,9
13
48

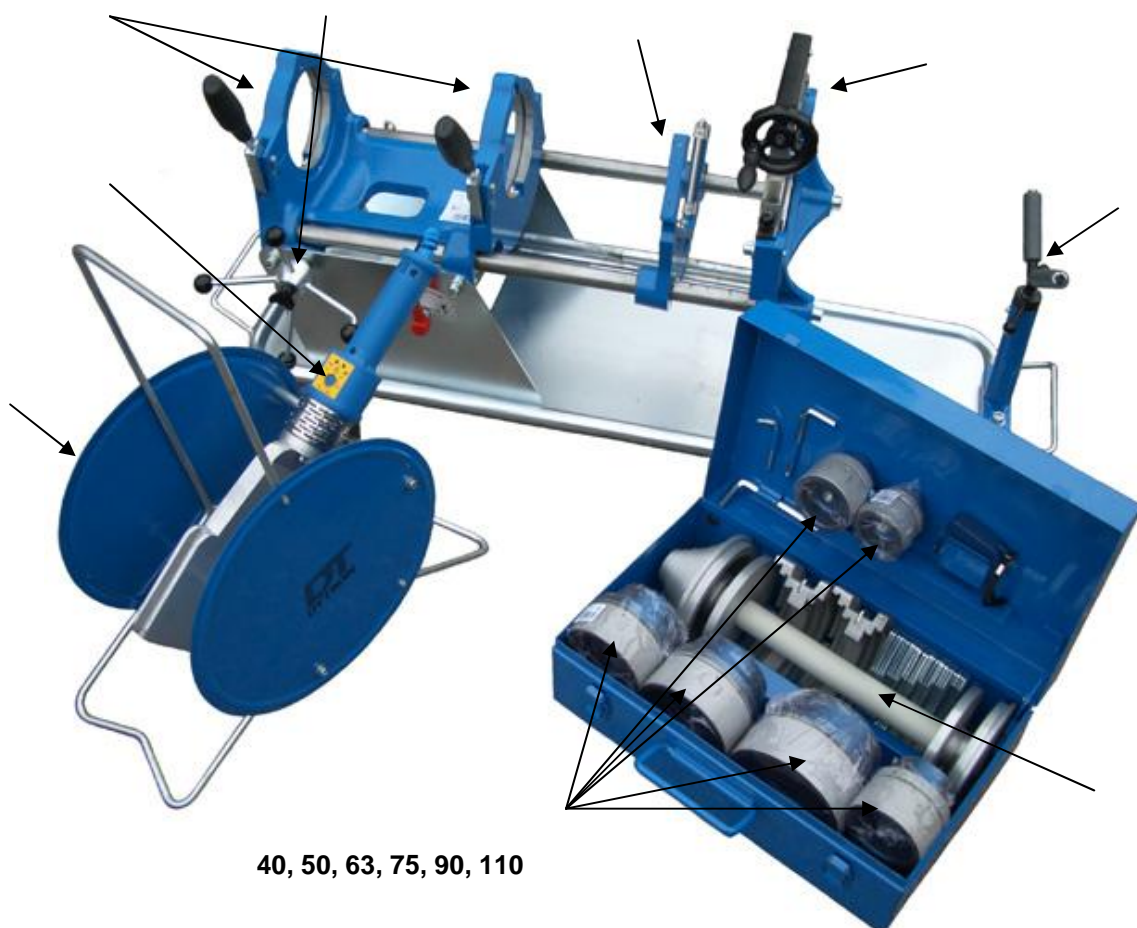

4


MP-110

4.1




4.2

« »

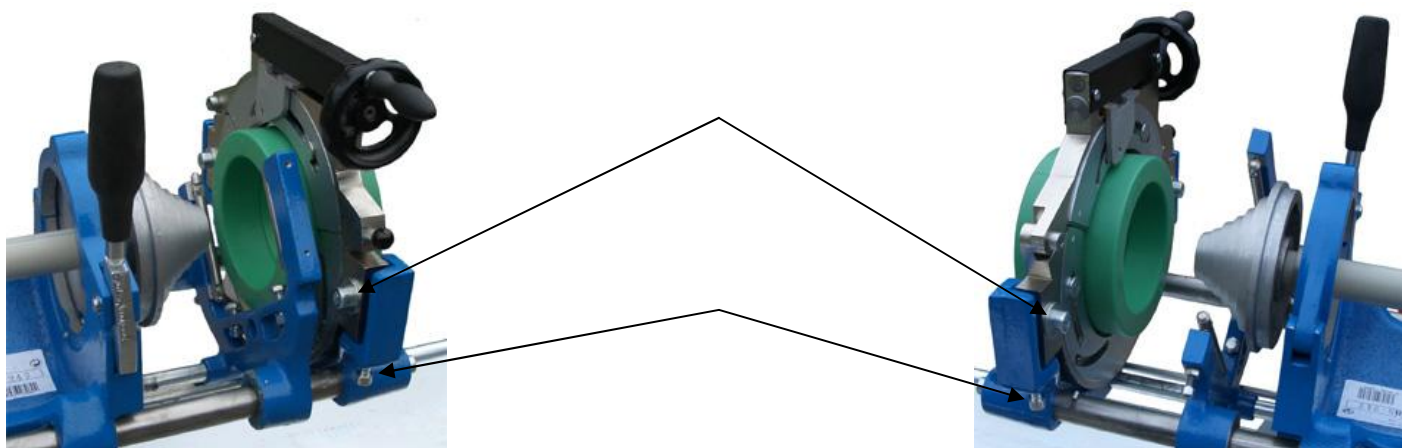

4.3



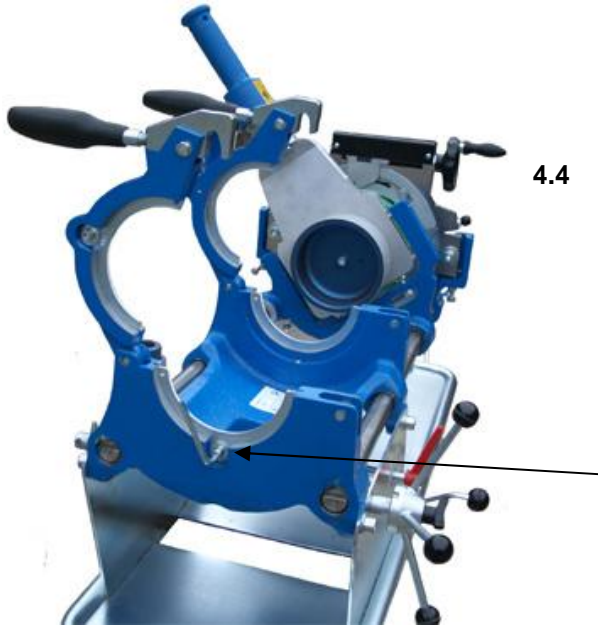

4

4.5



4.6



(— 230°C). PN10, 260. — 260°C.

5-10

4.7



3


	40	50	63	75	90	110
	12	12	24	30	40	50
	6	6	8	8	8	10
	20	20	30	30	40	50
	4	4	6	6	6	8

3 (PPRC).

4.8




5

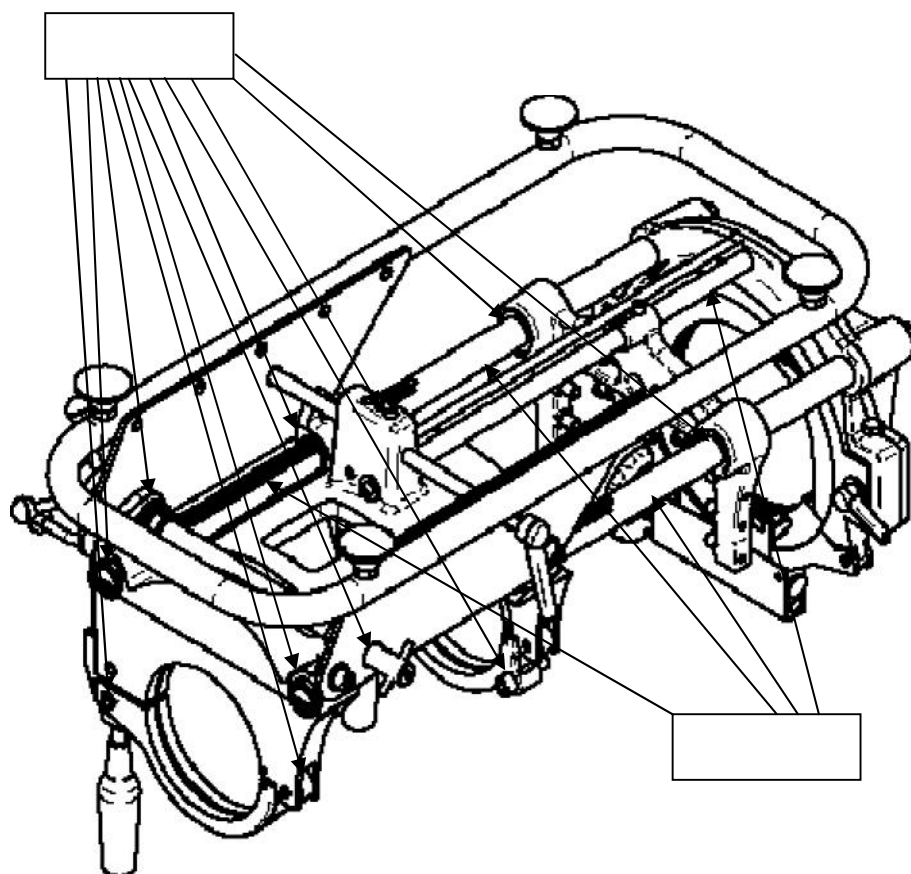


DYTRON, s.r.o.

6

6.1

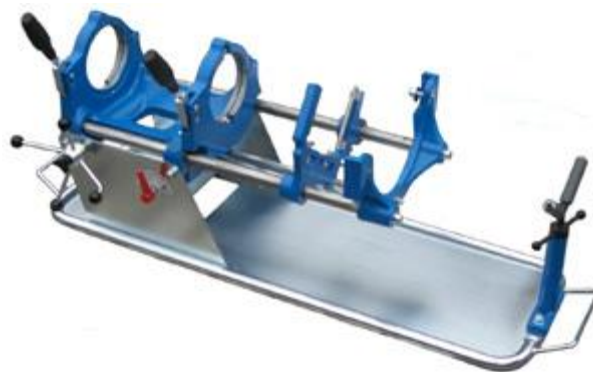

Ø 40-

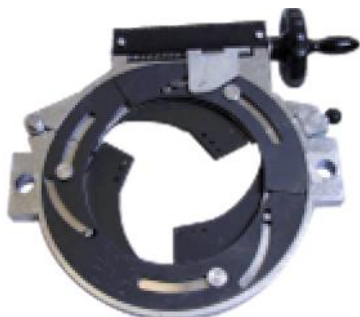

6.2

110



6.3

110

6.4

P-4a 1200W



6.5

6.5.1



6.5.2

(6-)



6.5.3

Ø 40	4	Ø 50	4
Ø 63	4	Ø 75	4
Ø 90	4	Ø 110	4



6.5.4

Ø 40	1	Ø 50	1
Ø 63	1	Ø 75	1
Ø 90	1	Ø 110	1



6.5.5

- 2



6.5.6



: MP-110 UM

: **DYTRON s.r.o.**
Toužimská 943/24a, 197 00 Praha 9 - Kbely
Tel.: +420-2-66190011-3, fax: +420-2-66190038
e-mail: sales@dytron.ws
http://www.dytron.ws

:

MΩ

.: Ω

:

:

:

:

:

:

:

-

: