


WORLD 250

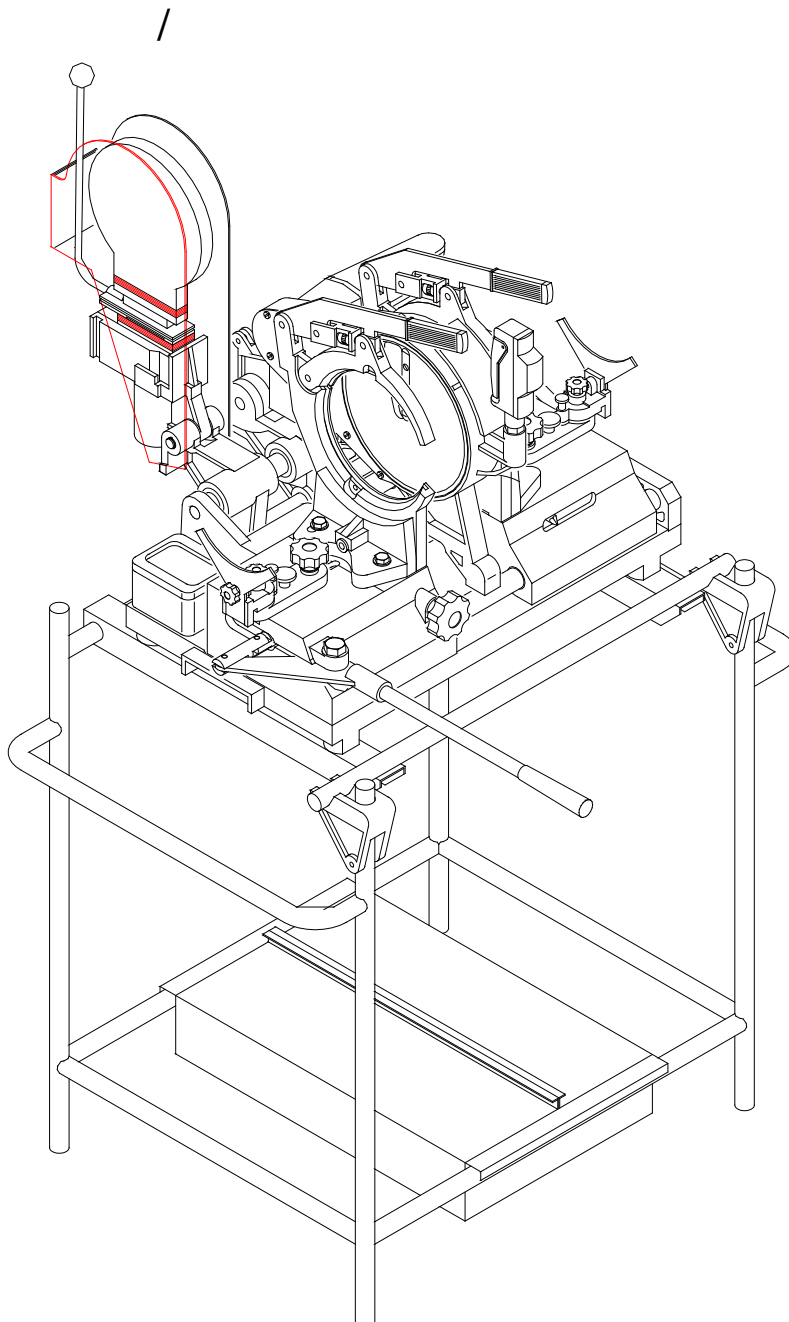

Uponor

Oy Uponor Infra Pipe Ab, Technology
 PL 383, 65101 Vaasa, Finland
 Tel. +358 6 326 5663
 Fax +358 6 326 5690
 www.kwhtech.com

Uponor

Uponor Infra Tech GmbH
 Industriestr. 15, 36088 Hünfeld, Germany
 Tel. +49 6652 911 89 40
 Fax +49 6652 911 89 44
 www.kwhtech.com

ADR TECH

« - » 7/8
 : (495) 150-0822
 www.adr-t.ru
 E-mail: info@adr-t.ru

1 3

2 3

2.1 3

2.2 3

2.3 3

2.4 5

2.5 / / 5

2.6 5

3 5

3.1 5

3.2 6

4 7

4.1 7

4.2 10

4.3 10

4.4 10

4.5 10

4.6 11

4.7 11

4.8 11

4.9 11

4.10 11

5 12

1

WORLD 250


2

WORLD 250

2.1

(
Uponor Infra Tech GmbH.

2.2



Внимание



Важно



Замечание

2.3

-
-
-
-
-

Uponor.

Uponor.



(.1).



(.1)



200°C,


(.1)



(.1).



(, .).

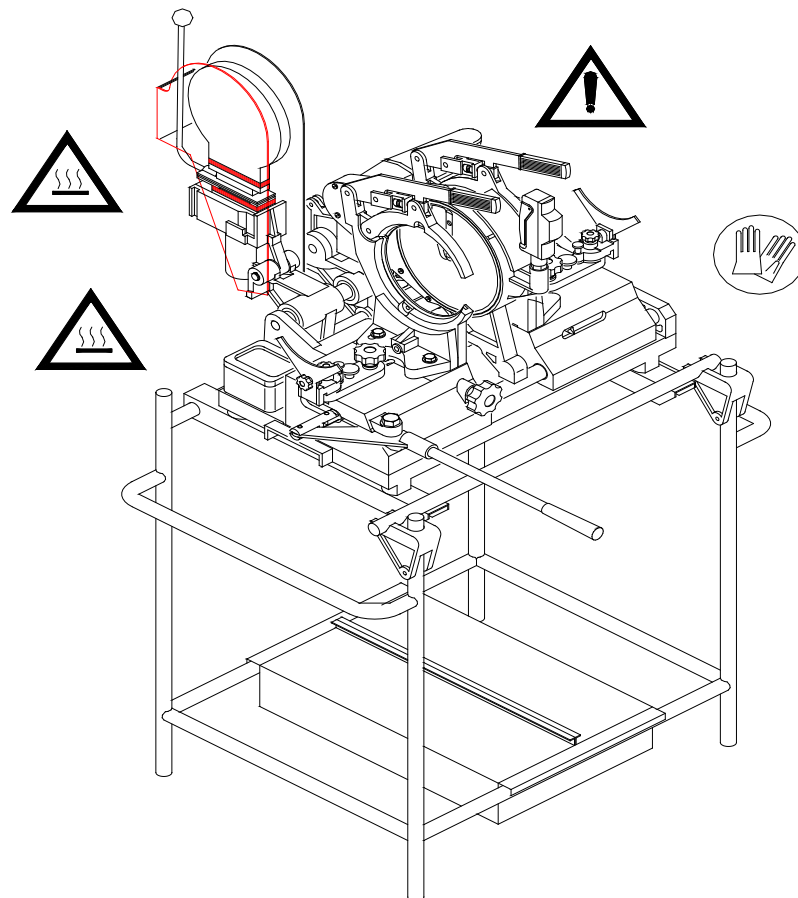

.1

2.4



Замечание

2.5

2.6

(“Maschinennr.”)

(Typ),

| | |
|-------------------------------|-----------|
| Stumpfschwei.maschine | |
| Typ | WORLD 250 |
| Maschinennr. | 0614 5002 |
| Uponor Infra Tech GmbH | |
| Industriestr. 15 | |
| D - 36088 Hunfeld | |
| Tel. +49 6652 911 8940 | |
| CE | |

3

3.1

— 220 , 50
 3 100
 — 105
 — 40-250

140

(SDR)

| | 40 | 50 | 63 | 75 | 90 | 110 | 125 | 140 | 160 | 180 | 200 | 225 | 250 |
|------|----|----|----|----|----|-----|-----|-----|-----|-----|-----|-----|-----|
| 7,4 | ● | ● | ● | ● | ● | ● | ● | ● | ○ | ○ | ○ | ○ | ○ |
| 9 | ● | ● | ● | ● | ● | ● | ● | ● | ● | ○ | ○ | ○ | ○ |
| 11 | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ○ | ○ | ○ |
| 13,6 | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ○ | ○ |
| 17 | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ○ |
| 17,6 | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ○ |
| 21 | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| 26 | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| 33 | ○ | ○ | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| 41 | ○ | ○ | ○ | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |

SDR 7,4 (-100 PN 25, -80 – PN 20, -63 – PN 16)
 Ø140

SDR 9 (-100 – PN 20, -80 – PN 16, -63 – PN 12,5) Ø160

SDR 13,6 (-100 – PN 12,5, -80 – PN 10, -63 – PN 8) Ø200




SDR 17 (-100 – PN 10, -80 – PN 8, -63 – PN 6,3) Ø225

SDR 21 (-100 – PN 8, -80 – PN 6,3, -63 – PN 5)

SDR 33 SDR 41

3.2

- (1),
- (2)
- (3).
- (4).
- Ø250 (5).
- Ø180, 200, 225 (6),
- Ø160
- Ø160 (7)
- 75, 90, 110, 125 140 (8).
- (9)
- 40-250 -
- (10)
- (11)
- (12)

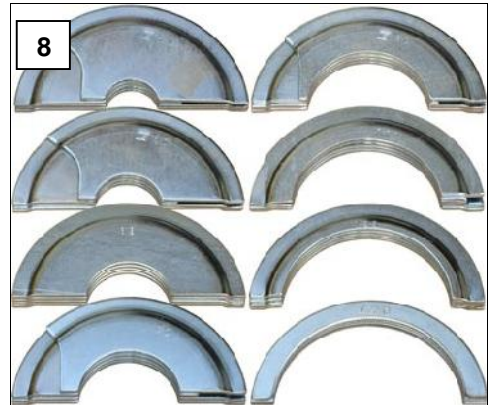
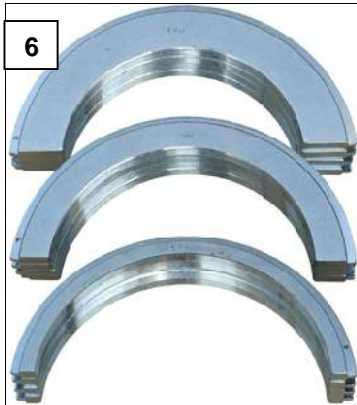
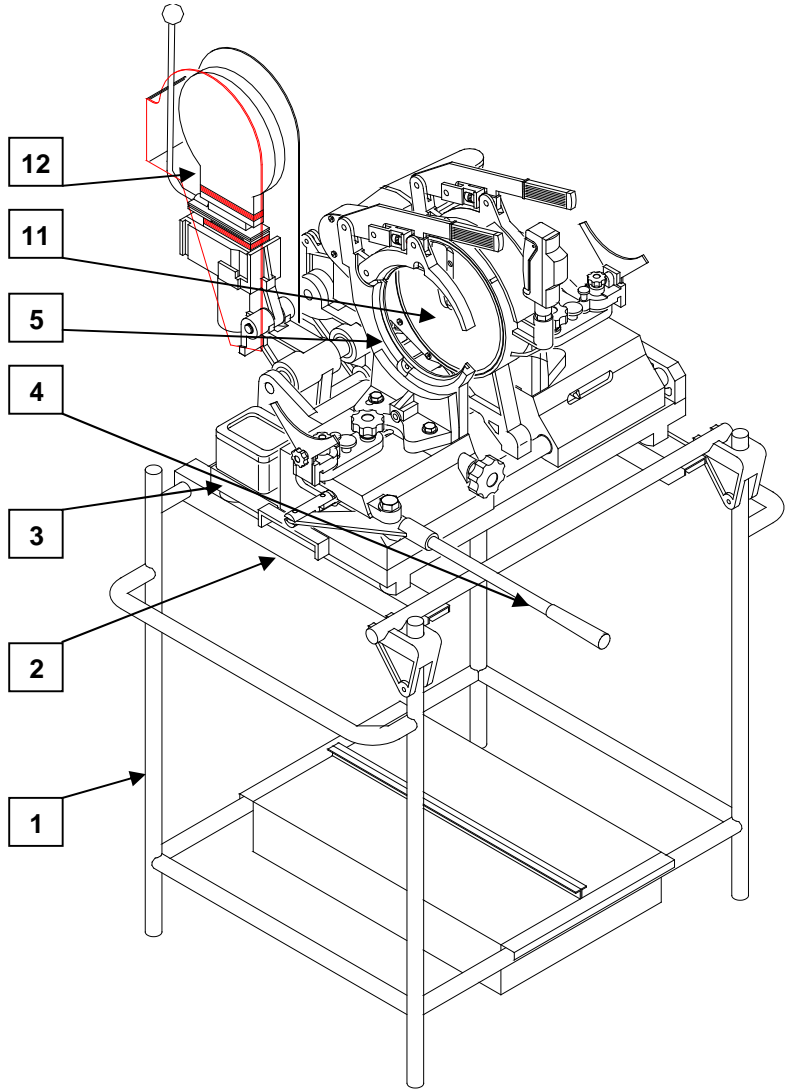


(13)

4

WORLD 250

4.1

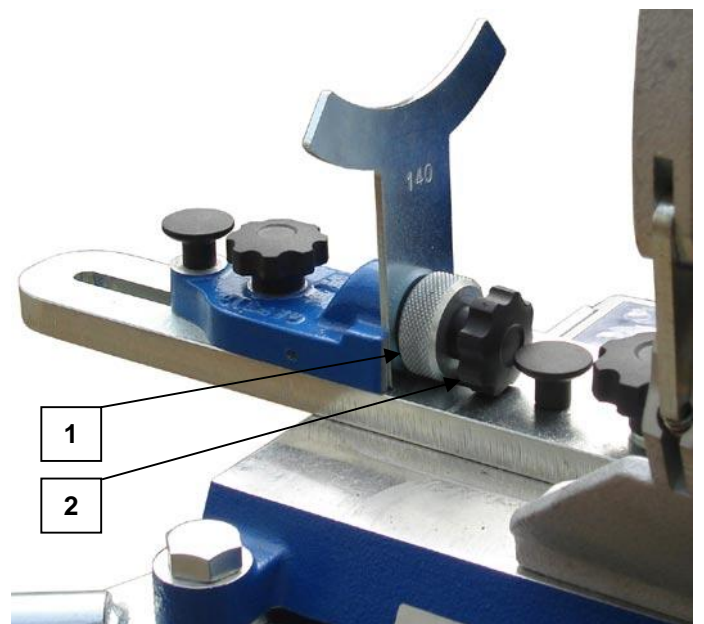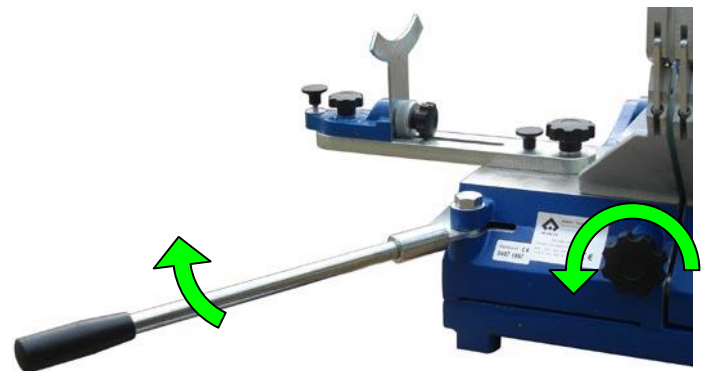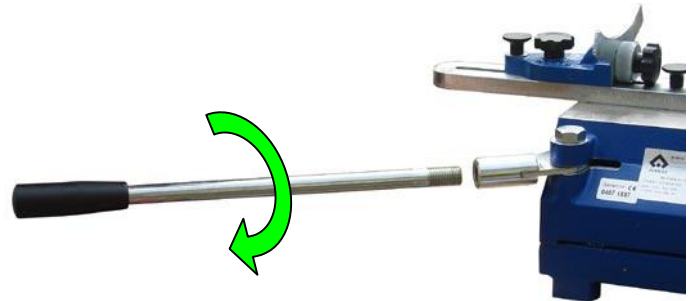

(2

4



(

).

(1),

(2).

(3), (2) / (4) (1) /

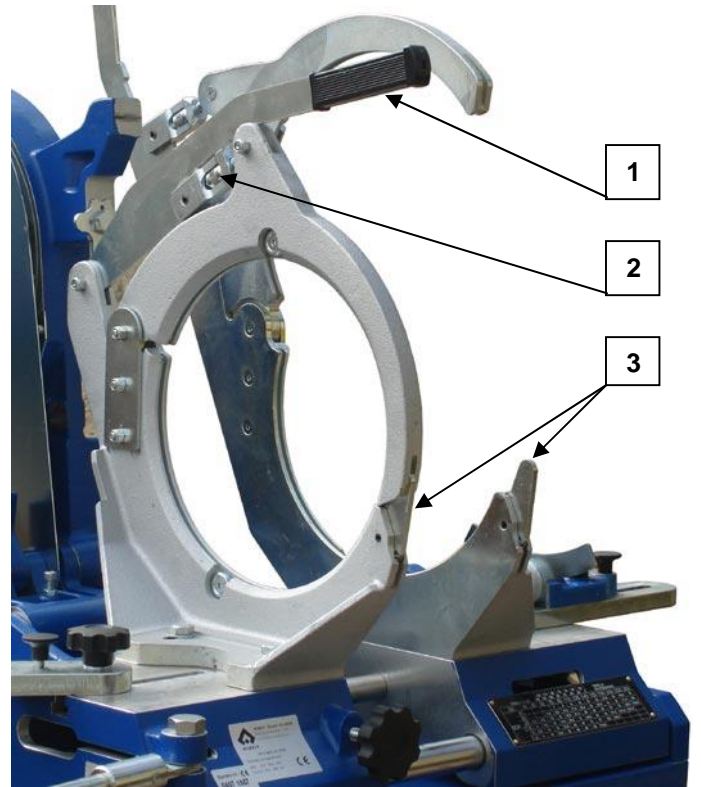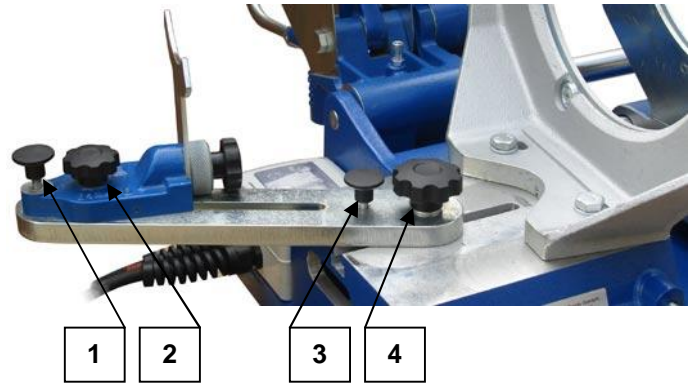


7,5°.


WORLD 250
0-15°.



- -
 -
- (3)

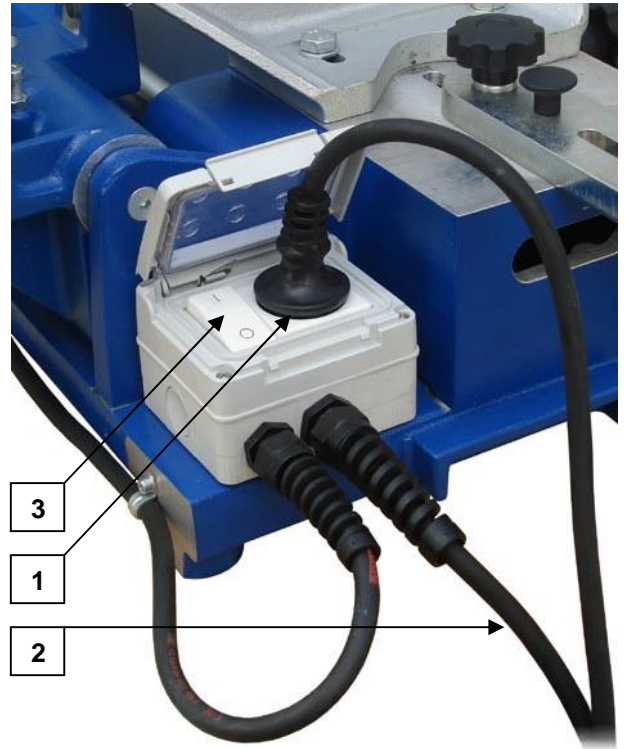


- (1)
- (2)

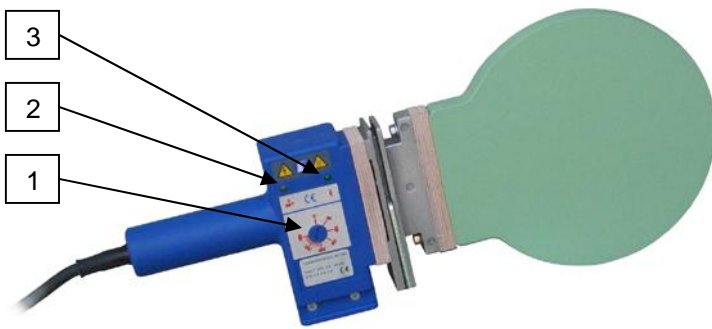

- (1) — (2)
- (3).

240±8°

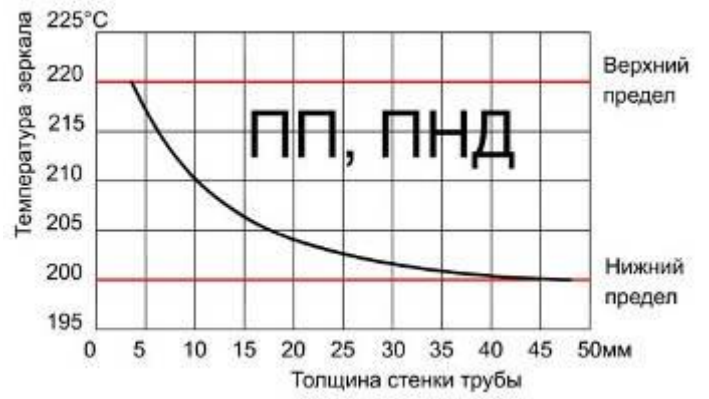


2-3

4.2

WORLD 250

(2). (1)
2-3

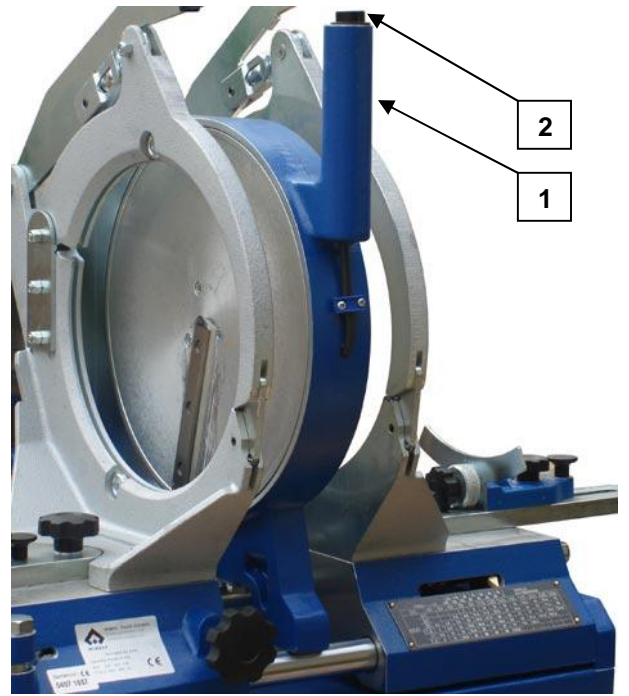

4.3

4.4

10%

4.5

(SDR:) ()

| | | PRESSURE KG | | | | | | | | | | | | | |
|--------|--|-------------|-----|------|------|------|------|------|-------|------|-------|-------|-------|-------|---|
| | | 130 | 120 | 110 | 100 | 90 | 80 | 70 | 60 | 50 | 40 | 30 | 20 | 10 | 0 |
| DN | | 40 | 50 | 63 | 75 | 90 | 110 | 125 | 140 | 160 | 180 | 200 | 225 | 250 | |
| 41 | | | | | 7 | 9 | 14 | 18 | 23 | 29 | 36.5 | 45 | 53.8 | 70 | |
| 33 | | | | 5.8 | 8.5 | 11.5 | 17.5 | 22.5 | 28 | 36.5 | 46 | 57 | 71.9 | 88 | |
| SDR 26 | | 3.6 | 4.6 | 7.5 | 10 | 14.5 | 21.5 | 28 | 34 | 43 | 57 | 70 | 88.8 | 109.8 | |
| 17.6 | | 4 | 6.5 | 10 | 14.5 | 20.5 | 31 | 39.5 | 50 | 66 | 81.5 | 101.5 | 127.9 | | |
| 11 | | 6.5 | 10 | 16 | 22.5 | 32 | 47 | 61 | 77 | 100 | 128.5 | | | | |
| 7.4 | | 9 | 14 | 22.5 | 32 | 46 | 68 | 88 | 110.5 | | | | | | |

14,5

Ø90

SDR 26.




10-
(Ø90 , SDR 26),

35

3,5

4.6

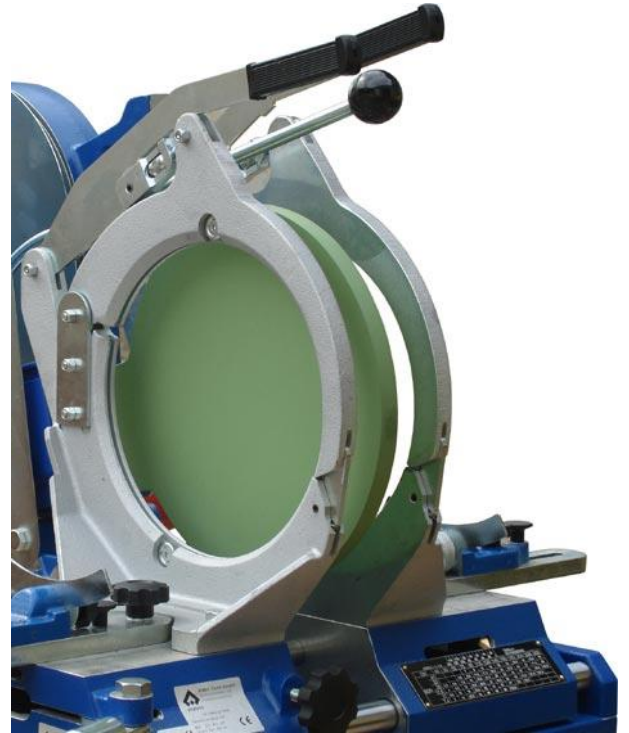

4.7

4.8

« »

4.9

« »



Замечание

4.10

5

| | | |
|------|-------------------|--------|
| 1. | | 4. |
| 2. | (.) | 5. |
| 3. | | 5.1. |
| 3.1. | Uponor Uponor. | .3.1., |
| 3.2. | | 5.2. |
| | | 5.3. |
| | | 5.4. |
| | | 5.5. |
| | | 5.6. |
| | | 5.7. |
| 3.3. | 6 | 6. |
| 3.4. | | 7. |
| | | .1. |